

# LSW-802P4T Lab Brick® Absorptive RF Switch

100 – 8000 MHz Frequency | 80 dB Isolation | 1.0 Watts

## Features/Benefits

- Reliable and Repeatable solid-state RF Switch
- USB powered
- USB or Ethernet control
- Includes GUI, Windows and Linux SDK, LabVIEW driver
- Operate multiple devices directly from a PC or self powered hub
- Standalone and rack mount solutions



## Applications

- Antenna switching
- Engineering/Production Test Stations
- Automated Test Equipment (ATE)

The Lab Brick LSW series of Switches bring affordability, functionality, reliability and simplicity to the microwave test bench.

The LSW-802 Switch series is a solid state, 50 Ohm absorptive RF/Microwave Switch. The switches are easily programmable for fast switching or sequenced switching directly from the Windows Graphical User Interface (GUI) or the WebUI. Alternatively, for users wishing to develop their own interface, Vaunix supplies LabVIEW drivers, Windows/Linux SDK files, Python examples and much more.

The Vaunix USB connection use a native USB HID interface to avoid the difficulties inherent in using older serial or IEEE-488 interfaces implemented over USB. As a result, Lab Brick users can get to work faster without having to install kernel level drivers, and Lab Brick devices can be easily used on any system that supports USB HID devices, including low cost embedded computers using Linux or similar operating systems.



The Vaunix advanced Ethernet functionality provides a 10/100 Ethernet network interface with selectable static/dynamic IP assignment. The included WebUI allows for simple device management and enables the user to configure the WebUI port and login credentials for maximum security.

## LSW-802P4T Specifications

Parameter	Test Conditions	Min	Typ	Max
Frequency Range (MHz)		100		8000
Impedance (Ohms)			50	
Insertion Loss (dB)	<3 GHz		2.5	3.5
	<6 GHz		3.75	4.5
	<8 GHz		4.5	5.5
Isolation - RFC to RFx (dB)		80	90	
Isolation - RFx to RFx (dB)		80	90	
Switching Speed (ns)	Trise/fall (10-90% of RF Out)			50
P1dB			39	
Maximum Input Level (dBm)	IL State/Hot Switching		35/27	
	Terminated Port		27	
Input IP3 (dBm)			60	
VSWR	RFC, RFx On		1.5:1	
	RFx Off		1.5:1	


Parameter	Test Conditions/Notes	
Power Requirements	From the USB connection	+5 VDC 100 mA
Environmental	Operating Temperature	-5 °C to +55 °C
	Relative Humidity (non-condensing)	<95%
Physical Connections	Power	USB Type C
	Control	USB/Ethernet
	RF Connectors	SMA - female
	Expansion Bus	Samtec FTSH-105-01-L-D-RA-K
Operating Modes	Manual Switch Control (GUI/API)	
Mechanical Size	Single unit 1RU (up to 6 units) 2RU (up to 12 units)	4.2x3.27x0.86 in. / 106.7x83.1x21.8 mm 17x8x1.73 in / 431.8x203.2x43.9 mm 17x8x3.48 in / 431.8x203.2x88.4 mm
Weight	Single unit 1RU (up to 6 units) 2RU (up to 12 units)	<0.45 lbs / 230 g 5.5 lbs / 2.5 kg 10 lbs / 4.5 kg

# LSW-802P4T Performance Plots

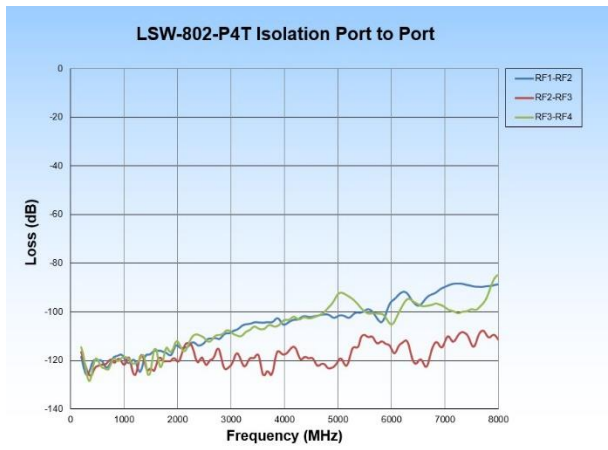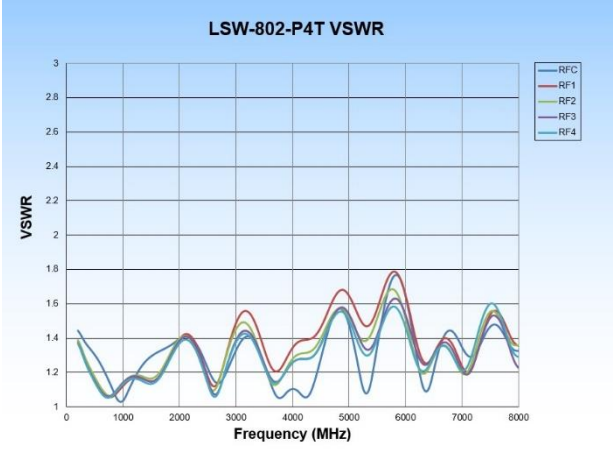


# LSW-802P4T Mechanical Outline


## Stand Alone:

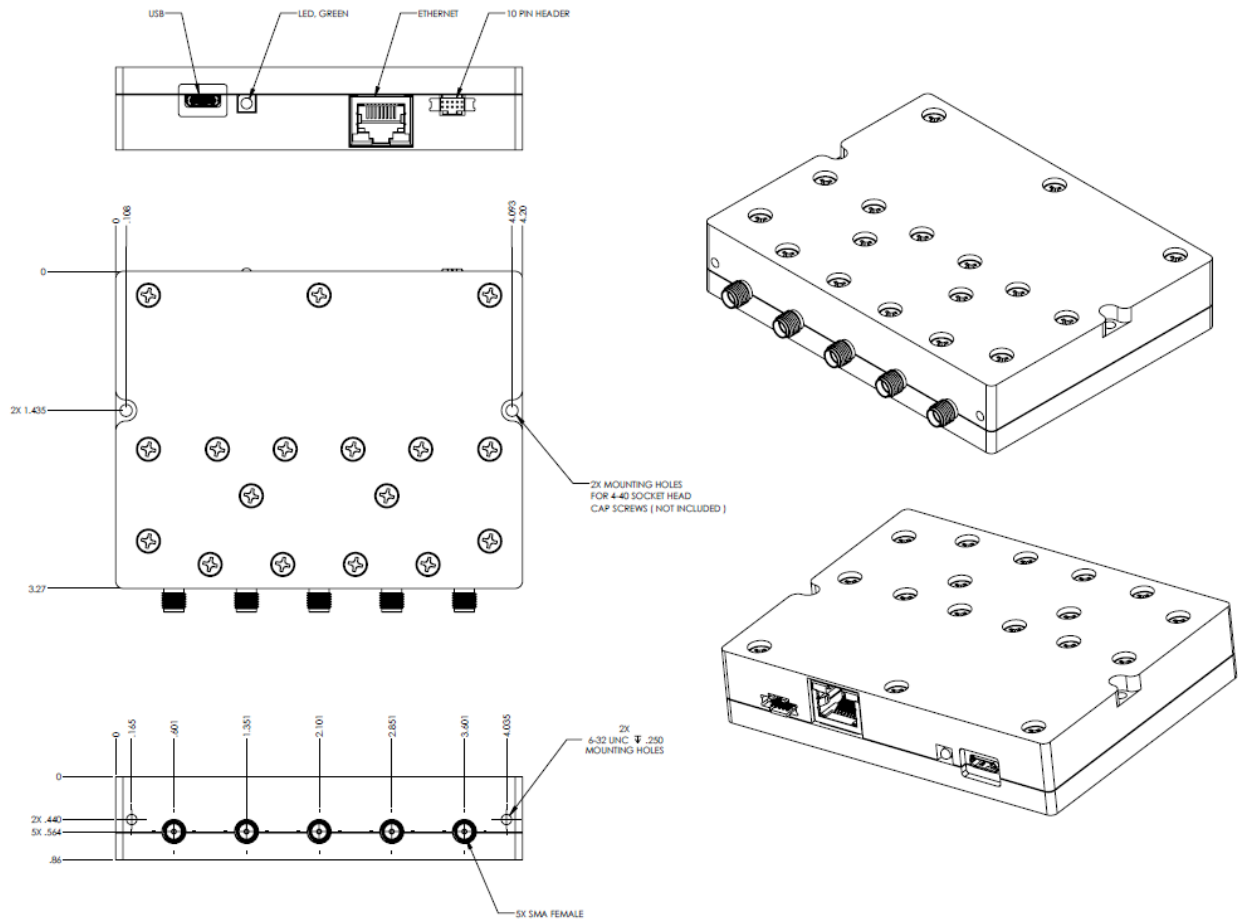

## 1 RU Rack Mount Chassis:

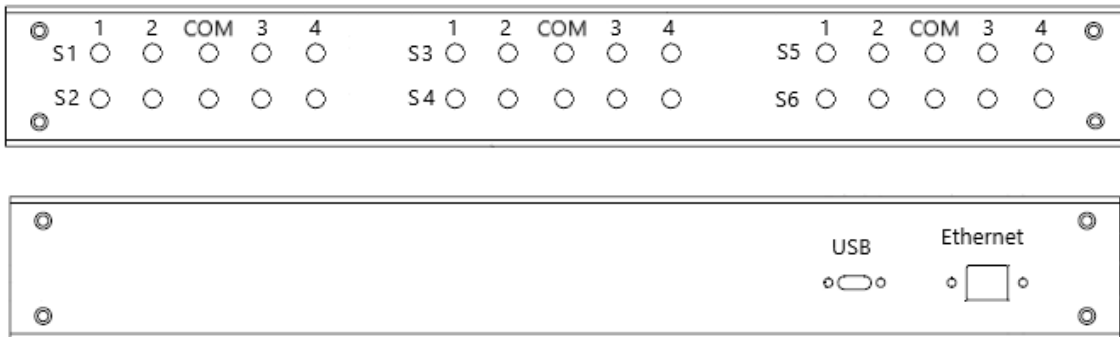


## 2 RU Rack Mount Chassis:

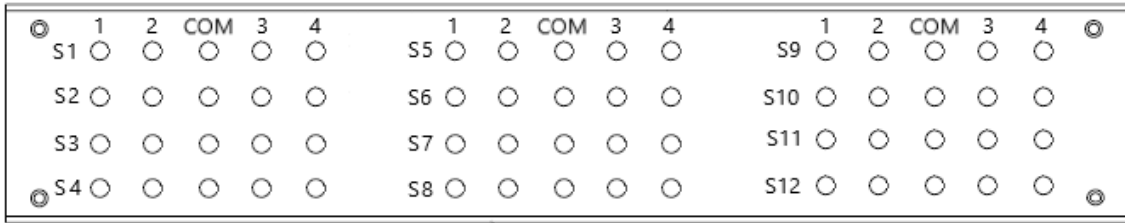

# LSW-802 Software Interface

## Windows GUI

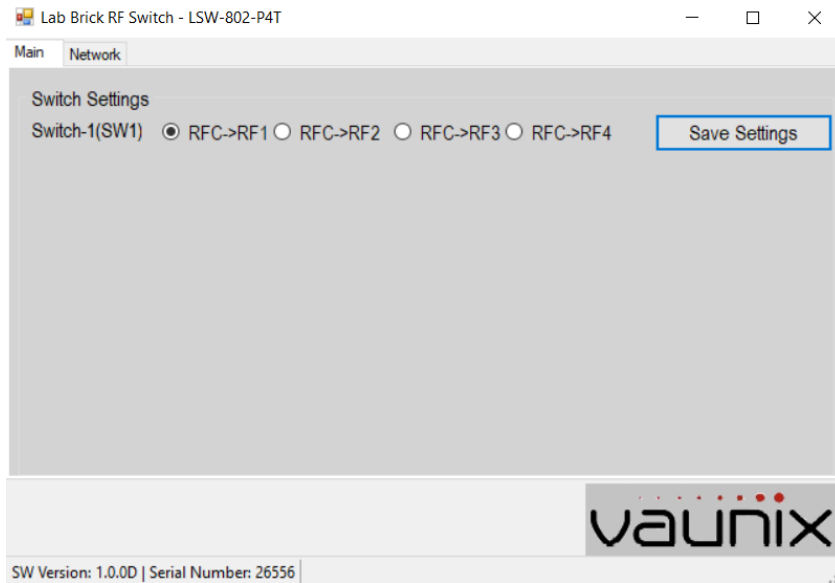

## Ethernet UI

